

Technical specification

# Winston LFP060AHA cell








PRODUCT WEBPAGE



## Winston LFP060AHA cell

Specifications		
Model name	LFP060AHA	Alternative product marking TS-LFP60AHA, WB-LYP60AHA
Nominal voltage	3.3 V	Operating voltage under load is 3.0 V
Capacity	60 AH	+/- 5%
Operating voltage	max 3.8 V - min 2.8 V	
Deep discharge voltage	2.8 V	The cell is damaged if voltage drops below this level
Maximal charge voltage	3.8 V	The cell is damaged if voltage exceeds this level
Optimal discharge current	< 30 A	0.5 C
Maximal discharge current	< 180 A	3 C, continuous for max 15 minutes from full charge
Max peak discharge current	< 600 A	10 C, maximal 5 seconds in 1 minute
Optimal charge current	< 30 A	0.5 C
Maximal charge current	< 180 A	< 3 C with battery temperature monitoring
Maximal continuous operating temperature	80 °C	The battery temperature should not increase this level during charge and discharge
Dimensions	114 x 203 x 61	Millimeters (tolerance +/- 2 mm)
Weight	2.3 kg	Kilograms (tolerance +/- 150g)
Optimal torque force	12 - 15 Nm	

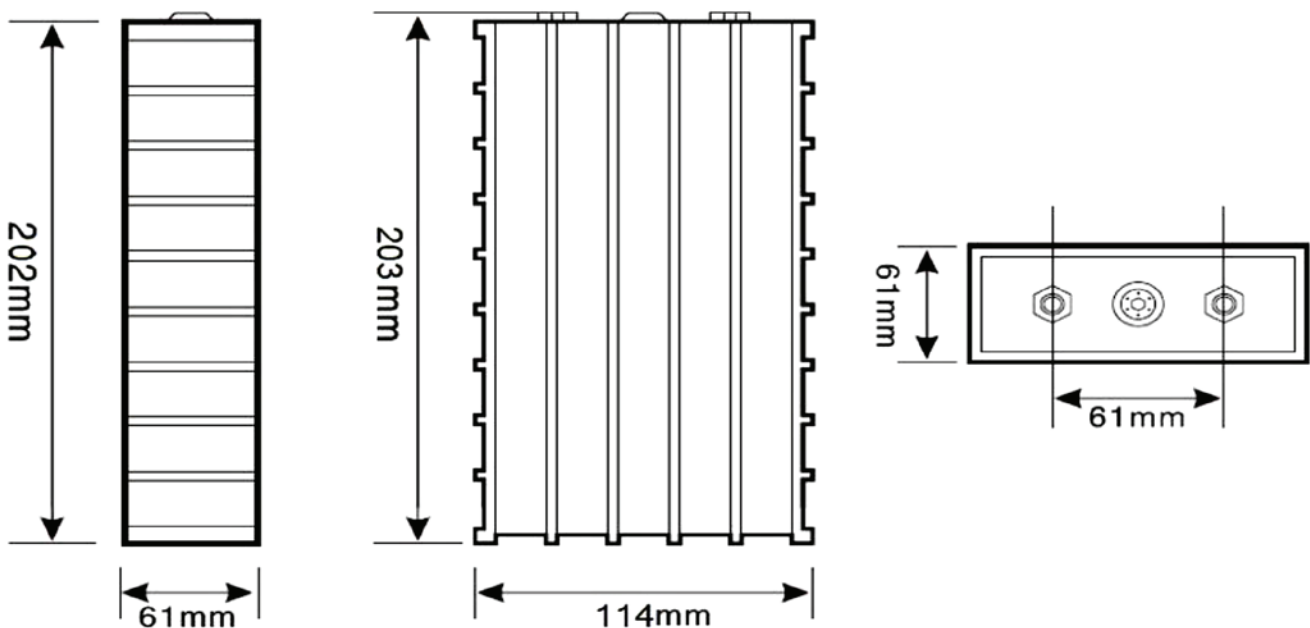

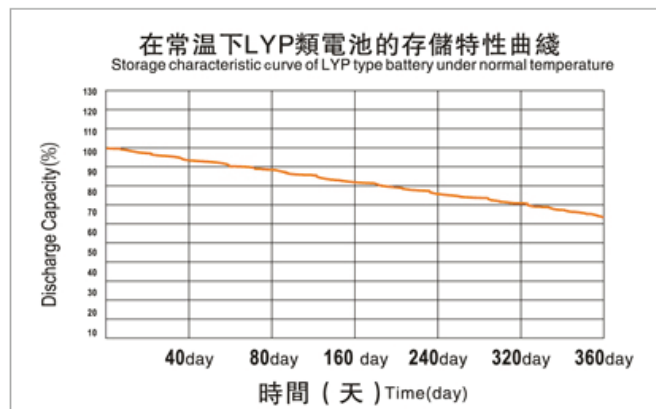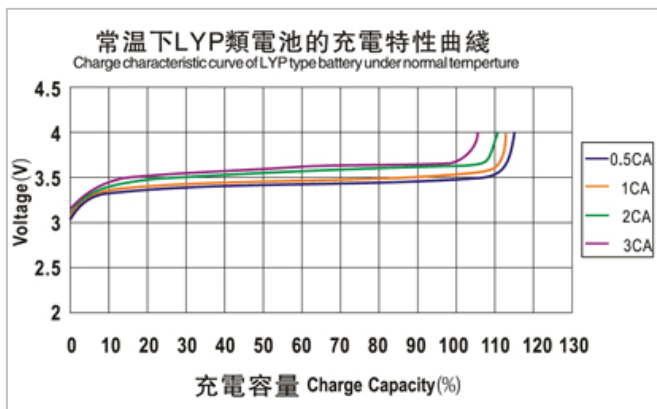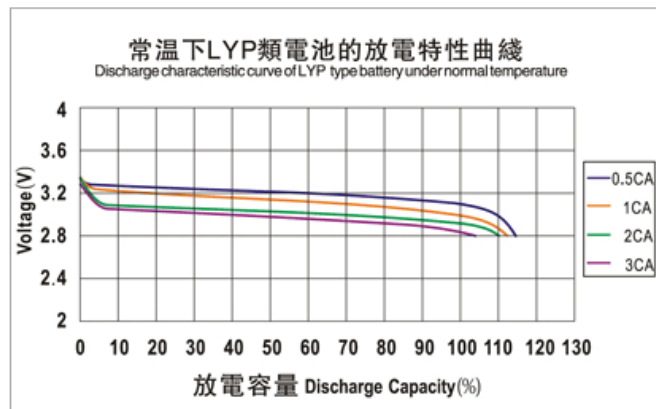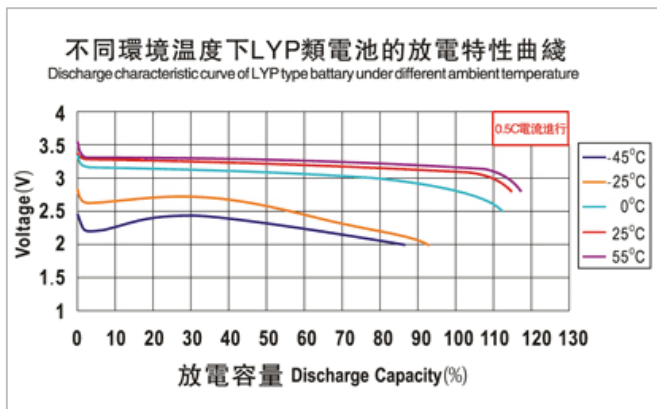

 **PRODUCT WEBPAGE** >



GWL a.s.  
Průmyslová 11, 102 00 Prague 10  
Czech Republic, European Union