

Technical specification

Winston LFP400AHA cell









PRODUCT WEBPAGE



Winston LFP400AHA cell

Specifications		
Model name	LFP400AHA	Alternative product marking TS-LFP400AHA, TS-LYP400AHA
Nominal voltage	3.3 V	Operating voltage under load is 3.0 V
Capacity	400 AH	+/- 5%
Operating voltage	max 3.8V - min 2.8V	At 80% DOD
Deep discharge voltage	2.5 V	The cells is damaged if voltage drops bellow this level
Maximal charge voltage	4 V	The cells is damaged if voltage exceeds this level
Optimal discharge current	< 200 A	0.5 C
Maximal discharge current	< 1200 A	3 C, continuous for max 15 minutes from full charge
Max peak discharge current	< 4000 A	10 C, maximal 5 seconds in 1 minute
Optimal charge current	< 200 A	0.5 C
Maximal charge current	< 1200 A	< 3 C with battery temperature monitoring
Maximal continuous operating temperature	65 °C	The battery temperature should not increase this level during charge and discharge
Dimensions	461 x 285 x 65	Millimeters (tolerance +/- 2 mm)
Weight	13,5 kg	Kilograms (tolerance +/- 150g)
Optimal torque force	45 - 50 Nm	

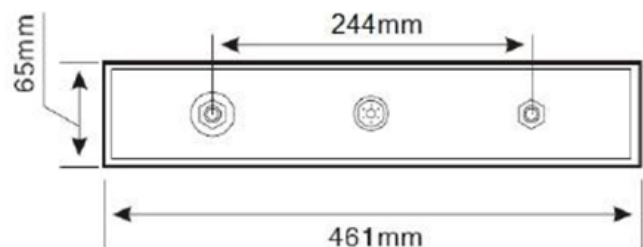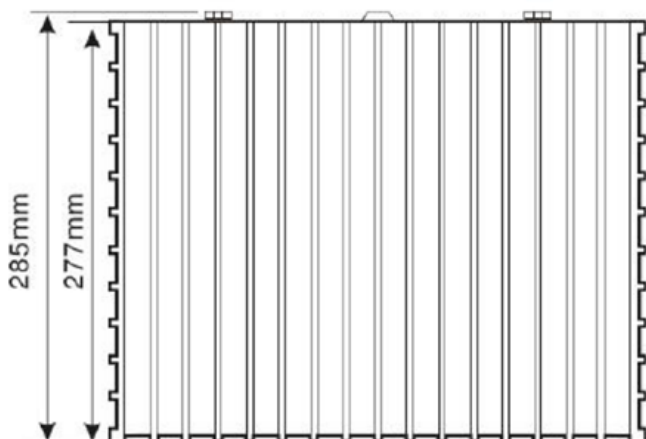

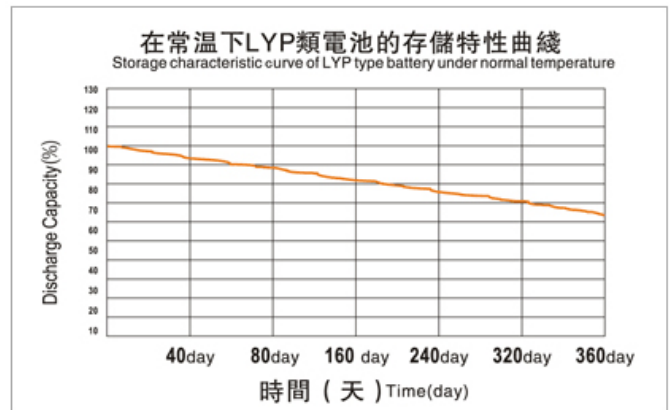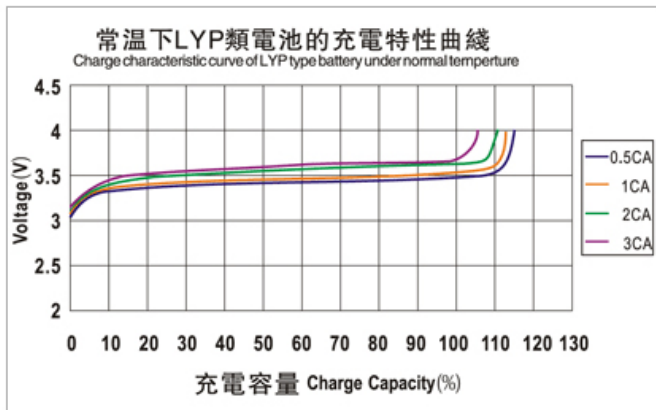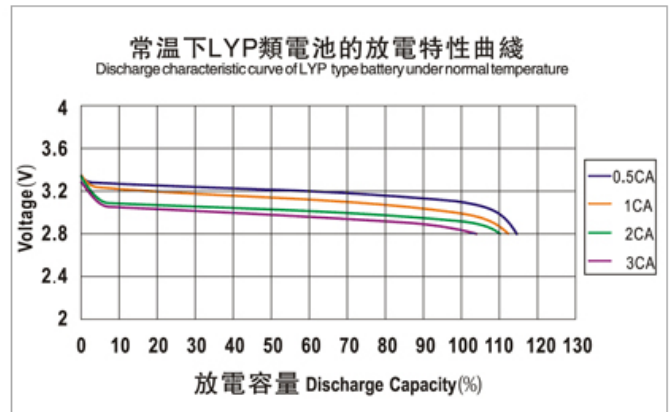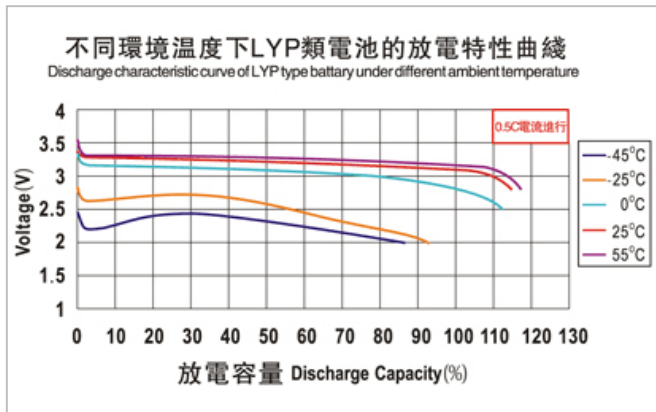

 [PRODUCT WEBPAGE](#) >



GWL a.s.
Průmyslová 11, 102 00 Prague 10
Czech Republic, European Union